



HYDROCOM[®]

CONSERVE AND CONTROL

Controller

- RoHS-compliant microprocessor
- Ethernet, cellular or Wi-Fi Internet connection
- Operate up to 16 sensors
- AC-powered with two AA lithium-ion backup batteries
- 256K encryption
- Programmable maximum water flow setting
- Maintenance-free ball valve
- Two-year warranty
- Dimensions: 6.75" x 4.75" x 2", 14 oz

Transmitter/Wireless Sensor

- Powered by two AA alkaline batteries
- Three-year battery life
- RoHS-compliant microprocessor
- 900 MHz two-way communication
- Temperature detection at 40°F
- Wall mounted
- Dimensions: 2" x 3" x .75", 6 oz

Remote Wireless Sensor

- RoHS-compliant, stainless steel probes
- Water detection sensitivity to 2 ppm
- Humidity-proof
- Low-voltage operation

Valve

- Multiple size valves: 1", 1.5", 2" full port
- ~Low lead <= .025% conforms with California AB1953 and Vermont Act 193
- NSF Approved/ANSI 61 certified
- California Health & Safety Code 116875
- 38 gpm WOG

Flow Sensor


- 140 psi rating
- 98% accuracy at .5 oz per minute
- NSF-approved nylon

Actuator

- 6 volts
- NEMA 4 enclosure
- Splash-proof
- ISO 2001-2008 certified

Power Supply

- UL certified Class II power supply
- 5 volts / 2 amps / 50 mV ripple
- FCC approved

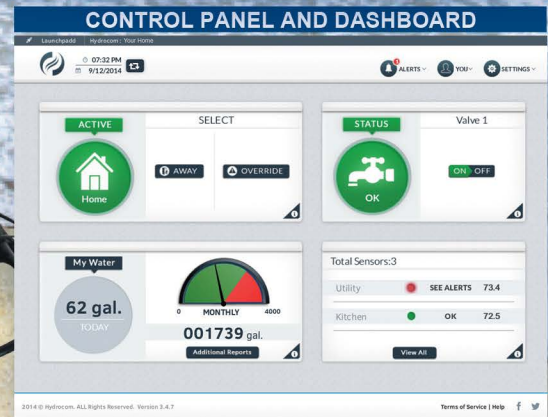

Internet Connectivity

- Connect via Ethernet, cellular or Wi-Fi.
- Download the Hydrocom app on the App Store or Google Play to configure the Hydrocom system to your network.



888.502.1102 • www.hydro-com.com

40 Sunset Drive, Suite #7 | Basalt, Colorado 81621